

Signal lights
Series SL-x-F Ampel



Signal lights

Series SL-x-F Ampel

The signal lights series SL-X-F-Ampel with their very flat design are easy to use in door or gate applications or other mounting surfaces and they can be fastened without any cut-off. The fully encapsulated electronics for a high protection degree (IP 68) assures waterproof, oil-proof and easy to clean.



The operating voltage is 24 V. The robust LEDs are current stabilized.

TECHNICAL DATA

- Power supply 21-27 V DC
- Robust aluminium housing
- New compact design
- LED colours Red/Yellow/Green
- Completely encapsulated electronics in crystal clear PUR casting
- High luminosity
- Integrated overcurrent and temperature protection
- Max. ambient temperature 50° C
- Protection class IP 68, protection class 3



Switching functions

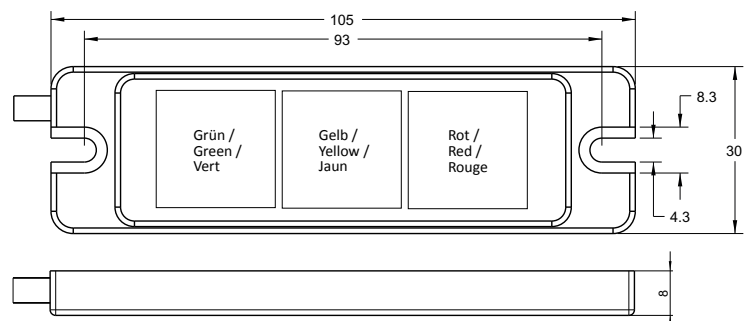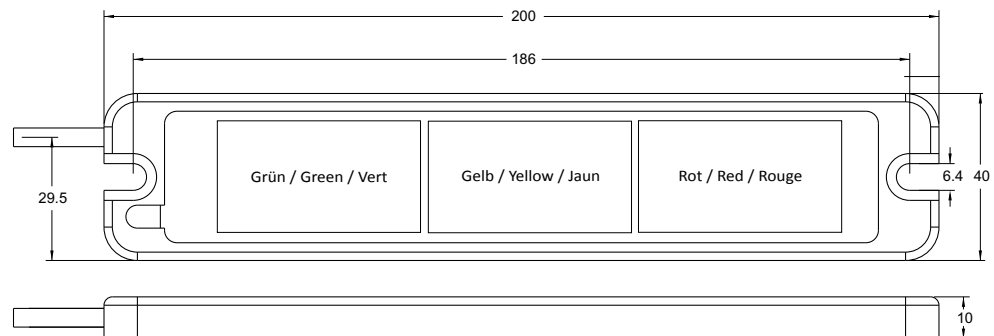

Type	Power consumption (mA)	Colour	Dimensions L x B x H (mm)	Weight (gram)	Connection	Part no.
Version with 5 m PVC/PVC cable						
SL-1-F Ampel	40/40/40	Red/Yellow/Green	105 x 30 x 8	150	5 m PVC/PVC	10706
SL-2-F Ampel	80/80/80	Red/Yellow/Green	200 x 40 x 10	350	5 m PVC/PVC	10710