

Signal lights
Series SL-x-F Ampel / Ampel R



Completely
casted

IP 68
protection
class

Signal lights

Series SL-x-F Ampel / Ampel R

The signal lights **SL-x-F-Ampel** with their very flat design are quite simple to door or gate systems or other mounting without cut-outs. They have a high degree of protection (IP 68) due to the fully encapsulated electronics. They have a high degree of protection (IP 68) due to the completely encapsulated electronics and are waterproof, oil-tight and easy to clean.



The operating voltage is 24 V. The robust LEDs are operated with current stabilisation.

TECHNICAL DATA

- Operating voltage 21–27 V DC
- Robust aluminium housing
- New compact design
- LEDs colors Red/Yellow/Green
- Completely encapsulated electronics in crystal clear PUR casting
- High luminosity
- Max. ambient temperature 50° C
- Integrated reverse polarity protection
- IP 68 protection class, protection class 3



Switching functions

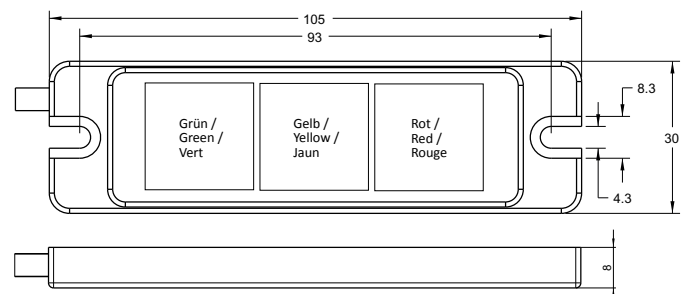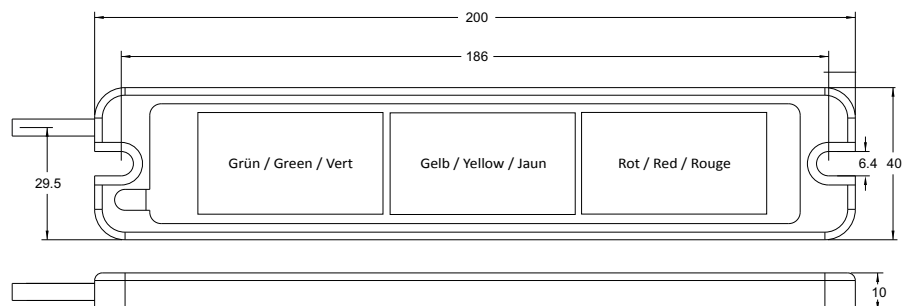

Type	Part no.	Power consumption (mA)	Color	Dimensions L x W x H (mm)	GTIN/EAN
Version with 5 m PVC/PVC cable					
SL-1-F Ampel	10706	40/40/40	Red/Yellow/Green	105 x 30 x 8	4262388142499
SL-2-F Ampel	10710	80/80/80	Red/Yellow/Green	200 x 40 x 10	4262388142505
SL-1-Ampel R	11520	33/33/16	Red/Yellow/Green	105 x 30 x 8	4262388143052