

Signal lights  
Series SL-x-TRIO



# Signal lights

## Series SL-x-TRIO

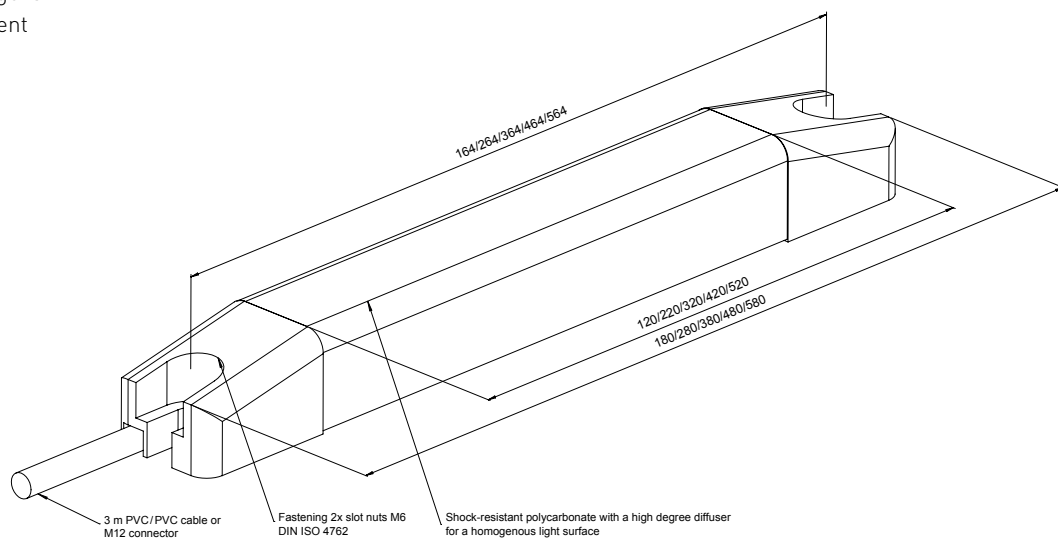
The signal light series **SL-x-TRIO** is designed for front installation using two M6 hexagon socket head cap screws (DIN ISO 4762). These signal lights can thus be easily integrated into profile systems with T-nuts.



The stable aluminium housing and the shock-resistant polycarbonate optics can withstand tough industrial environments. The polycarbonate diffuser, which was specially developed for LED applications, ensures a homogeneous light-emitting surface with high efficiency.

The electrical installation is easily realised with a power supply of 24 V DC via a 4-pole PVC cable of 5 m in length or with a M12 connector. The power supply range is 21–27 V DC. The maximum ambient temperature is 50°C.

### TECHNICAL DATA

- Operating voltage 21–27 V DC
- Signal colours in one light:  
Red/Yellow/Green/Blue
- Resistant to shock or vibration
- Robust, anodized aluminium housing
- Shock-resistant polycarbonate diffuser
- IP 54 protection class, protection class 3



Type	Part no.	Power consumption Color Red/Yellow/Green/Blue (mA)	Dimensions L x W x H (mm)	GTIN/EAN
Version with M12 connector 				
SL-05-TRIO M12	11335	20/40/20/20	130 x 24 x 20	4262388142765
SL-1-TRIO M12	10911	40/80/40/40	180 x 24 x 20	4262388142574
SL-2-TRIO M12	11005	80/160/80/80	280 x 24 x 20	4262388142581
SL-3-TRIO M12	11006	120/240/120/120	380 x 24 x 20	4262388142598
SL-4-TRIO M12	11007	160/320/160/160	480 x 24 x 20	4262388142604
SL-5-TRIO M12	11008	200/400/200/200	580 x 24 x 20	4262388142611
Version with 5 m PVC/PVC cable 				
SL-05-TRIO LC	11336	20/40/20/20	130 x 24 x 20	4262388142772
SL-1-TRIO LC	10742	40/80/40/40	180 x 24 x 20	4262388142512
SL-2-TRIO LC	10743	80/160/80/80	280 x 24 x 20	4262388142529
SL-3-TRIO LC	10744	120/240/120/120	380 x 24 x 20	4262388142536
SL-4-TRIO LC	10745	160/320/160/160	480 x 24 x 20	4262388142543
SL-5-TRIO LC	10746	200/400/200/200	580 x 24 x 20	4262388142550