


Signal lights  
Series SL-x-Ampel-xx

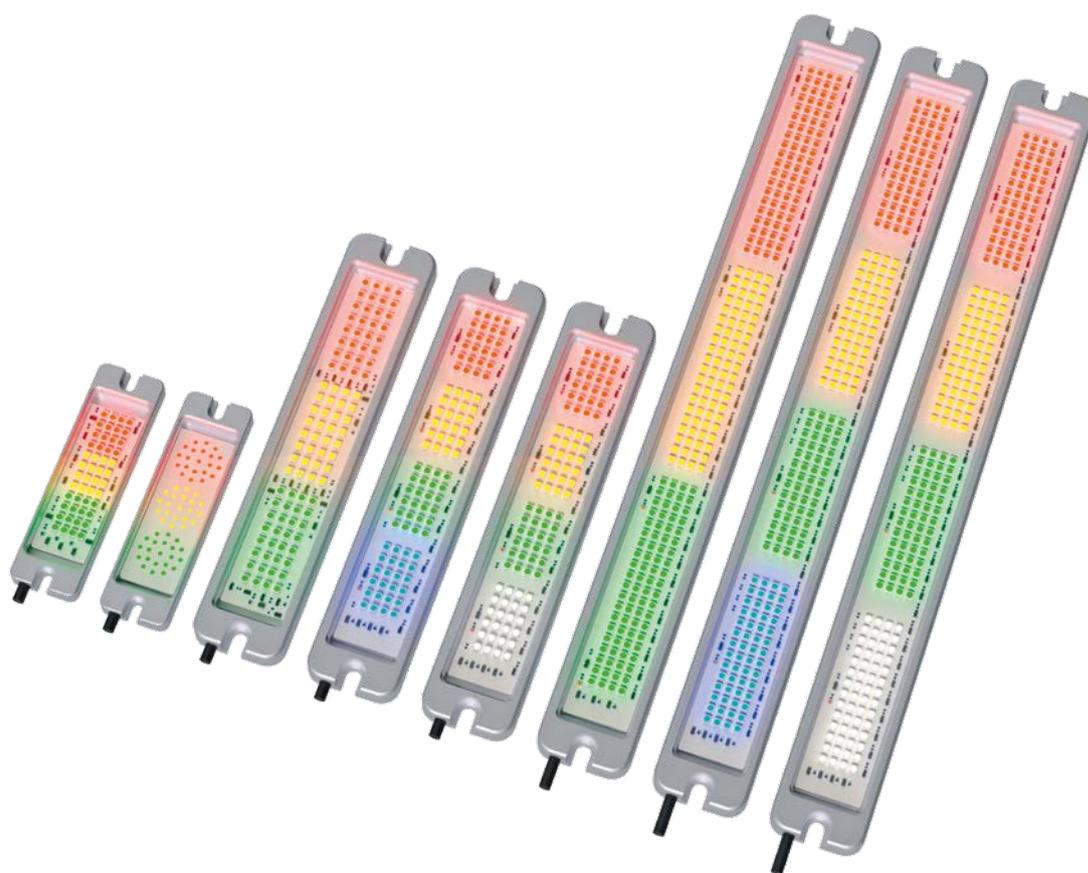

Completely  
encapsulated

Protection  
class  
IP67/IP68

Flat  
10 mm

# Signal lights


## Series SL-x-Ampel-xx

The **SL-x-Ampel-xx** signal lights are very flat in design, making them easy to attach to doors, gates, or other mounting surfaces without cutouts. Thanks to their completely encapsulated electronics, they offer a high degree of protection and are water- and oil-tight as well as easy to clean.

The operating voltage is 24 V. The robust LEDs are operated with internal current stabilization.

### TECHNICAL DATA

- Operating voltage 21– 27 V DC
- Robust aluminium housing
- Compact flat design
- LED colors Red / Yellow / Green / Blue or White
- Completely encapsulated electronics in crystal clear PUR casting
- High luminosity
- Ambient temperature max. 45° C (uncooled)
- Reverse polarity protection
- Protection class IP67 / IP68, protection class 3

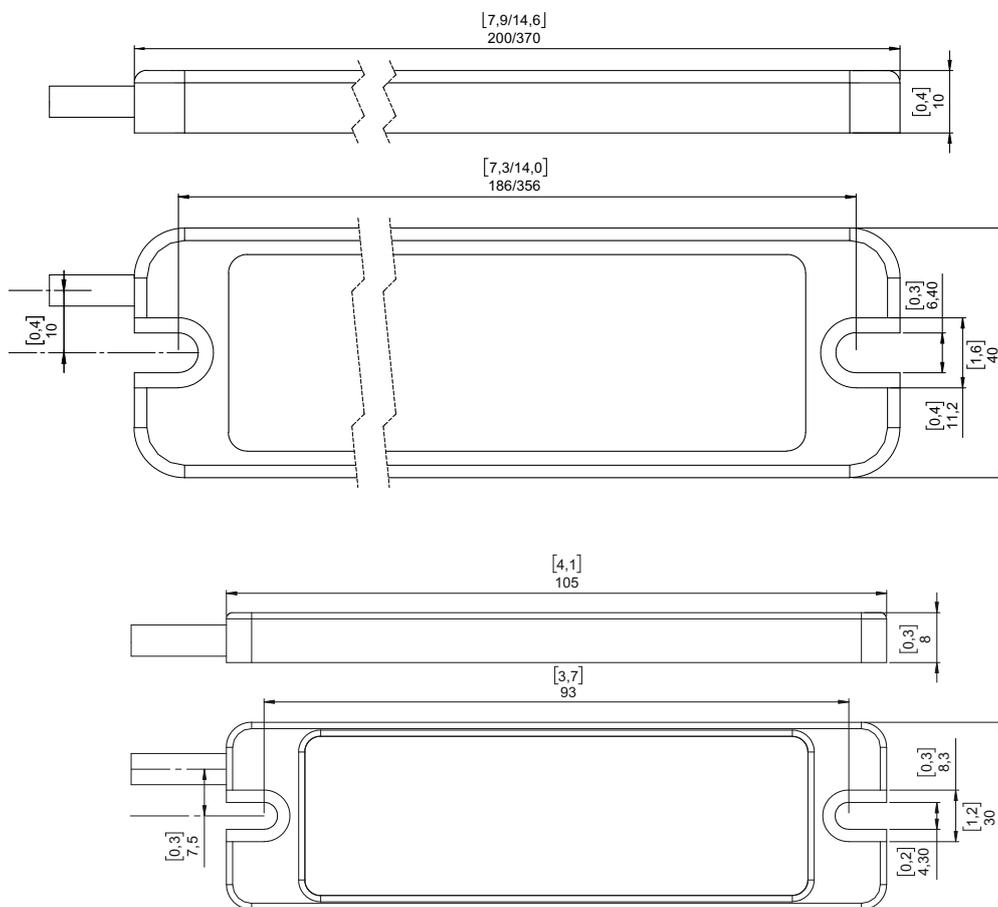

(SL-1-Ampel, SL-1-Ampel-R)

Type	Part no.	Signal colors
Version with 5 m PVC / PVC 4 or 5-pin		
SL-1-Ampel	10706	Red/Yellow/Green
SL-2-Ampel	10710	Red/Yellow/Green
SL-1-Ampel-R	11520	Red/Yellow/Green
SL-3-Ampel	11934	Red/Yellow/Green

Type	Part no.	Signal colors
Version with 5 m PVC / PVC 4 or 5-pin		
SL-2-Ampel QW	11834	Red/Yellow/Green/White
SL-2-Ampel QB	11835	Red/Yellow/Green/Blue
SL-3-Ampel QW	11936	Red/Yellow/Green/White
SL-3-Ampel QB	11935	Red/Yellow/Green/Blue